


PIN OUT	P3	P1	P2
1 RED	1	1	1 RED
		2	2 GREEN
		3	3 WHITE
4 BLACK	4	4	4 BLACK
		5	5 YELLOW
		6	6 BLUE
		7	7 DRAIN DRAIN
		8	8 ORANGE
		9	9 PURPLE
SHELL	SHELL	SHELL BRAID+ DRIAN	SHELL

PACKING DRAW

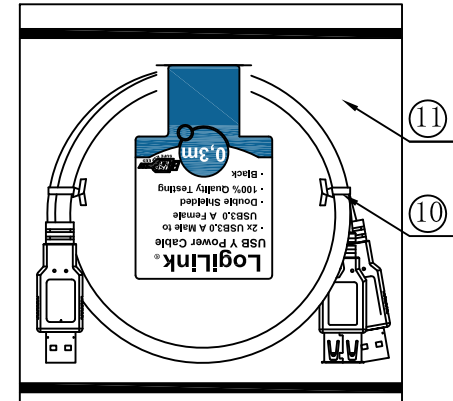

NOTE:
Electrical test:
100% open short & miss wire test.
MATERIAL LIST

No.	PART NAME	DESCRIPTION	QTY	REMARK
⑪	PACKAGE	PE BAG	1	
⑩	MINI TIE	L=100mm	2	
⑨	PRINTING	AWM 80°C 30V VW-1 USB 3.0 SUPER SPEED CABLE		
⑧	CABLE	7*0.12 BC*2C+PVC OD: 3.0±0.1, COLOR: BLACK	0.3M	
⑦	CABLE	7*0.12 BC*1P+7*0.12 BC*2C+[7*0.12 BC*1P+D(7*0.12BC)+AL]*2+AL+D(7*0.12 BC)+B(16*6*0.12ALMG)+PVC, OD:5.3 ±0.1mm, COLOR: BLACK	0.3M	
⑥	MOLD HOOD	PVC, COLOR: BLACK	1	
⑤	MOLD HOOD	PVC, COLOR: BLACK	1	
④	MOLD HOOD	PVC, COLOR: BLACK	1	
③	CONNECTOR	USB 3.0A MALE, NICKEL PLATED	1	
②	CONNECTOR	USB 3.0 A FEMALE, NICKEL PLATED	1	
①	CONNECTOR	USB 3.0 A MALE, NICKEL PLATED	1	

DRAW No.	2D-USB1306201	NAME	USB Cable, USB 3.0, 2x A male to 1x A female, black, 0.3m		
CUSTOMER	2Direct GmbH		MAPE	TOLERANCE	
CUSTOMER No.	CU0070			X. ±1.00	X.X ±0.50
APPROVE BY	CHECK BY	DRAW BY	SCALE	MM	
USB1306201	William	USB1306201	PAGE	1/1	